

## HEAT SHRINK SPADES / QUICK CONNECTS MALE

Part Number	Colour	d2	B	L	E	D1	D
RL1-4H	RED	4.3	8	26	18.5	1.7	4.5
RL1-6H		6.5	11.6	31.5	18.5	1.7	4.5
RL1-8H		8.4	11.6	31.5	18.5	1.7	4.5
RL2-4H	BLUE	4.3	8.5	28.5	20.5	2.3	5.5
RL2-6H		6.5	12	33.5	20.5	2.3	5.5
RL2-8H		8.4	12	33.5	20.5	2.3	5.5
RL2-10H		10.5	13.6	37.2	20.5	2.3	5.5
RL5-4H	YELLOW	4.3	9.5	33	23.5	3.4	6.5
RL5-6H		6.5	12	36.5	23.5	3.4	6.5
RL5-8H		8.4	15	41	23.5	3.4	6.5
RL5-10H		10.5	15	41	23.5	3.4	6.5



NOTE:

### BRAZED SEAM

#### RL1-3.5H TO RL1-8H



1. WIRE RANGE: AWG 22-16 DIN 0.5-1.5mm<sup>2</sup>
2. WIRE SIZE: 0.25-1.65mm<sup>2</sup>
3. INSULATED COLOUR: RED
4. MAXIMUM ELECTRICAL RATING: 150°C 600 VOLTS 19 AMPRE MAX

#### RL2-3.5H TO RL2-10H

1. WIRE RANGE: AWG 16-14 DIN 1.5-2.5mm<sup>2</sup>
2. WIRE SIZE: 1.04-2.63mm<sup>2</sup>
3. INSULATED COLOUR: BLUE
4. MAXIMUM ELECTRICAL RATING: 150°C 600 VOLTS 27 AMPRE MAX

#### RL5-4H TO RL5-12H

1. WIRE RANGE: AWG 12-10 DIN 4-6mm<sup>2</sup>
2. WIRE SIZE: 2.63-6.64mm<sup>2</sup>
3. INSULATED COLOUR: YELLOW
4. MAXIMUM ELECTRICAL RATING: 150°C 600 VOLTS 48 AMPRE MAX

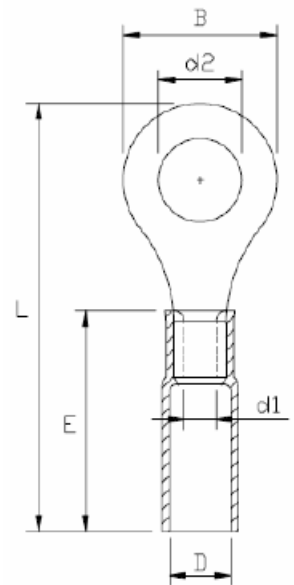

Disclaimer: Every reasonable effort has been made to ensure that this spec is correct at the time of printing, however Sunshine Coast Marine Electrical Doctor and its employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance of the whole or any part of this spec.